


F14 Fixed Patch Panel - 24 Position ST/FC up to 24 fibres

The F14 Fixed Patch Panel a reliable and robust 1U fixed patch panel. This panel has been designed to accept 24 fibres housed within a 1U space. With the ability to use either ST/FC adaptor types offering a flexible solution to the end user, enabling them to incorporate a multi functional panel which offers a cost effective option for installations.



In the addition to the array of adaptors the panel also offers multiple cable entry solutions, up to 6 standard cable entry points for, loose tube, tight buffer, pre-terminated and steel tape armoured cable. Each panels has integrated strength member tie positions.

Features

- Up to 24 fibres in 1U
- Multiple Adaptor options available
- 24 Adaptor positions
- Individually labelled ports
- 6 'Quick Slot' cable entry positions
- Compliant to ROHS and REACH/SvHC
- Fits standard 19"

Applications

- Data centres, premise installations, telecommunication networks
- Ethernet, Fibre Channel, ATM, LAN, MAN and WAN
- Data communication
- Indoor applications

Specification

ELEMENT

Height	1U (44.4mm)
Width	484mm
Depth	200mm
Net weight	2.2kg
Packaged weight	2.5kg
Packaged dimensions	530mm (W) x 260mm (D) x 50mm (H)
IP rating	IP20
Suitable for Adaptor type	ST/ FC
Mounting adjustment range	82mm
Cable Entry 20mm	4
Cable entry 25mm	2
Material	Cold rolled steel
Material thickness	1.2mm
Material coating	Electrostatic powder coating
Colour	Grey RAL 7035
Operating temperature	-40°C to +60°C
Compliant to	RoHS, Reach / SVHC
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754, EN 297-1

Ordering Information


F28	Front Connector		Number Of Adaptors XX
	STS	ST Singlemode	
STM	ST Multimode		
FCS	FC Singlemode		
FCM	FC Multimode		
FCA	FC APC		

Example Part Number

F28	FCS	12
-----	-----	----

This part number generator has created an: fixed pre-term breakout panel with 12 FC singlemode adaptors

Technical Drawing

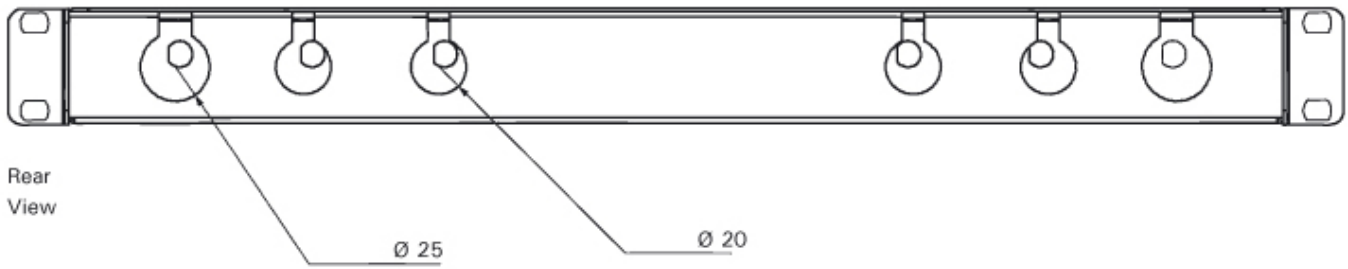

Mounting Adjustment

