

F25 Fixed Patch Panel - 48 Position ST/FC up to 48 fibres

This innovative, robust 2U fixed patch panel has been designed to accept up to 48 fibres housed within a 2U space.

With the ability to use a full array of adapter types, this panel offers a flexible solution to the end user; enabling them to incorporate a multi functional panel which allows easy access during installation or re-work with no disturbance of the existing cable or fibres.

In the addition to array of adapters the panel also offers multiple cable entry solutions, up to 8 standard entry points for loose tube, tight buffered, pre-terminated and steel tape armoured cable.



Features

- Up to 48 fibres in 2U
- Multiple adaptor options available
- 48 adaptor positions
- Individually labelled ports
- Compliant to ROHS and REACH/SvHC
- Fits standard 19"

Applications

- Data centres, premise installations, telecommunication networks
- Ethernet, Fibre Channel, ATM, LAN, MAN and WAN
- Data communication
- Indoor applications

Specification

ELEMENT

Height	2U (88.8mm)
Width	480mm
Depth	300mm
Net weight	3.7kg
Packaged weight	3.9kg
Packaged dimensions	530mm (W) x 110mm (H) x 330mm (D)
IP Rating	IP20
Suitable for adaptor type	ST/ FC
Number of ports	48
Mounting adjustment range	80mm
Cable entry 20mm	4
Cable entry 25mm	4
Material	Cold rolled steel
Material thickness	1.2mm
Material coating	Powder coating
Colour	Grey RAL 7035
Operating temperature	-40°C to +60°C
Compliant to	RoHS, Reach / SVHC
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754, EN 297-1

Ordering Information




F25	Front Connector		Number Of Adaptors
	STS	ST Singlemode	24
STM	ST Multimode	36	
FCS	FC Singlemode	48	
FCM	FC Multimode		
FCA	FC APC		

Example Part Number


F25	STM	48
-----	-----	----

This part number generator has created an: fixed panel with 48 ST Multimode adaptors


Technical Drawing

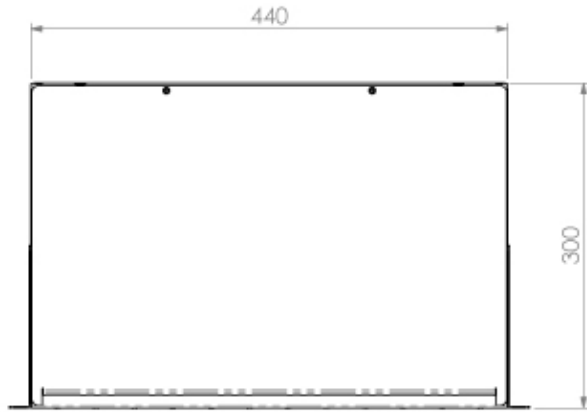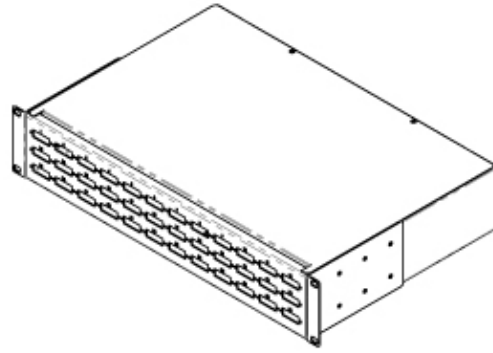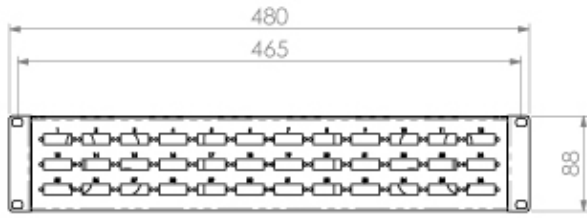

Standard Mounting

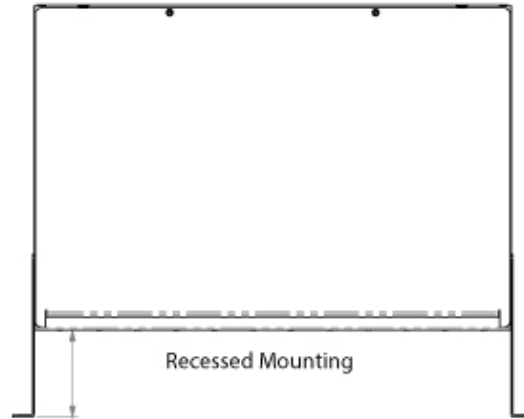

Recessed Mounting

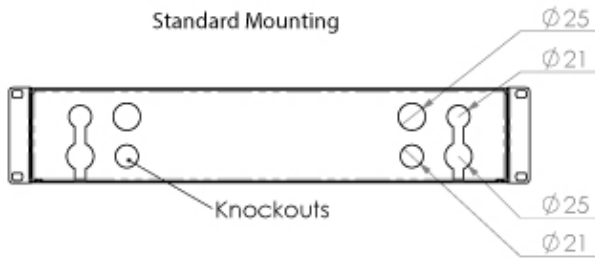

Material: Steel
Finish: Powder Coat